


# 防爆有机房货梯标准土建布置图

Explosion Proof Cargo Elevator Standard layout

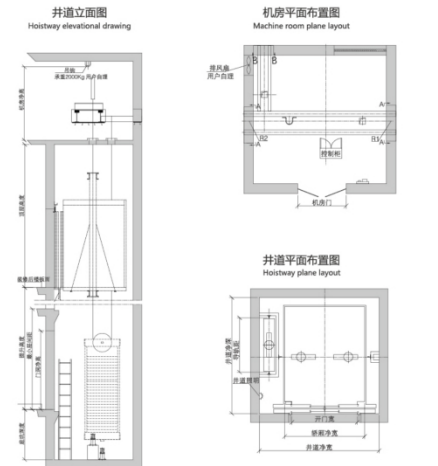


载重 (kg) Load	速度 (m/s) Speed	轿厢尺寸 Car size	开门尺寸 Door-open size	井道尺寸(最小) Shaft(min)	导轨深度 PIL depth	轿厢高度 Overhead height	机房净尺寸 Net size of machine room	开门方式 Opening mode
		宽Wx深Dx高H (mm)	宽Wx深D (mm)	宽Wx深D (mm)	(mm)	(mm)	宽Wx深Dx高H (mm)	
1000	0.5/1.0	1300x1800x2200	1000x2100	2200x2300	1400	4300	3000x3500x2200	双折旁开
1600	0.5/1.0	1600x2200x2200	1300x2100	2500x2700	1400	4500	3500x4000x2300	
2000	0.5/1.0	1600x2400x2200	1300x2100	2500x3100	1400	4500	3500x4300x2300	
3000	0.5	2200x2700x2200	1800x2100	3300x3200	1700	4500	3500x4200x2300	双折中分
5000	0.25/0.5	2400x3600x2300	2000x2100	3800x3300	1700	5000	3800x4200x2400	
6000	0.25/0.5	2800x3200x2500	2400x2400	4200x3700	1800	5000	4200x3800x2600	
4000	0.25/0.5	2600x4000x2500	2200x2400	4000x4400	1800	5000	4000x4400x2600	
8000	0.25/0.5	3000x4500x2500	2600x2400	4500x5000	1800	4800	4500x5100x2600	
10000	0.25/0.5	3400x5000x2500	2800x2400	5000x5400	1800	6000	4200x5400x3000	

(本资料仅供参考设计选用参考, 详细参数以技术图纸为准。)  
The data is for design reference only. For the detailed parameters, please take the technical drawing as the criterion.

# 防爆无机房货梯标准土建布置图

Explosion Proof Cargo Elevator Standard layout

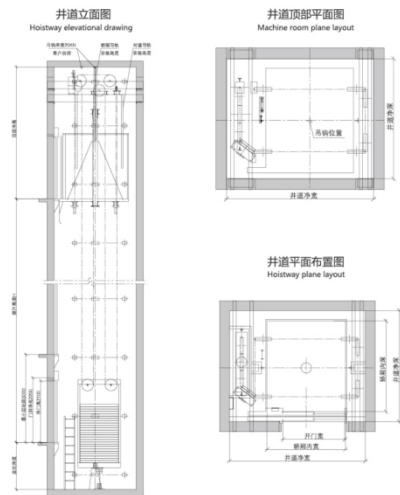

载重 (kg) Load	速度 (m/s) Speed	轿厢尺寸 Car size	开门尺寸 Door-open size	井道尺寸(最小) Shaft(min)	导轨深度 Guide depth	轿厢高度 Overhead (mm)	开门方式 Opening mode
		宽Wx深Dx高H	宽Wx深D	宽Wx深D	宽Wx深D		
1000	0.5/1.0	1600x1500x2200	1300x2100	2600x2100	1700	4200	双折旁开
1600	0.5/1.0	1900x2000x2200	1000x2100	3000x2800	1700	4500	
2000	0.5/1.0	1900x2200x2200	1500x2100	3300x2800	1700	4500	
3000	0.5/1.0	2200x2700x2200	1800x2100	3700x3200	1700	4800	
5000	0.5/1.0	2400x3600x2500	2000x2400	4100x4100	1800	5500	
8000	0.5/1.0	2400x3600x2500	2000x2400	4100x4100	1800	5500	

(本资料仅供参考设计选用参考, 详细参数以技术图纸为准。)  
The data is for design reference only. For the detailed parameters, please take the technical drawing as the criterion.